2.42	If the threshold is vertical is it no more than ¼ inch high? Or No more than ½ inch high with the top ¼ inch beveled no steeper than 1:2, if the threshold was installed on or	Yes No Measurement: Yes No Measurement:	1/A*max-+c:		 Remove or replace threshold •
	after the 1991 ADA Standards went into effect (1/26/93)? Or			•	
	No more than ¾ inch high with the top ½ inch beveled no steeper than 1:2, if the threshold was installed before the 1991 ADA Standards went into effect (1/26/93)? [404.2.5, 303.2]	Yes No Measurement:	1/2*max-		
	Note: The first ¼ inch of the ¼ or ¾ inch threshold may be vertical; the rest must be beveled.		3/4"max=[Photo #:	
2.43	Is the door equipped with hardware that is operable with one hand and does not require tight grasping, pinching or twisting of the wrist? Door handle?	Yes No			Replace inaccessible knob with lever, loop or push hardware Add automatic door opener
	Lock (if provided)? [404.2.7]	Yes No		Photo #:	

2.44	Are the operable parts of the hardware no less than 34 inches and no greater than 48 inches above the floor? [404.2.7]	Yes No Measurement:	34"-48"	Photo #:	• Change hardware height •
2.45	Can the door be opened easily (5 pounds maximum force)? [404.2.9] Note: You can use a pressure gauge or fish scale to measure force. If you do not have one you will need to judge whether the door is easy to open.	Yes No Measurement:	5 lbf	Photo #:	 Adjust or replace closers Install lighter doors Install power-assisted or automatic door openers
2.46	If the door has a closer, does it take at least 5 seconds to close from an open position of 90 degrees to a position of 12 degrees from the latch? [404.2.8.1]	Yes No Measurement:	90. 12. 12.	Photo #:	• Adjust closer •
Room	s and Spaces – stores, superç	narķets, libraries	, etc.		
2.47	Are aisles and pathways to goods and services, and to one of each type of sales and service counters, at least 36 inches wide? [403.5.1]	Yes No Measurement:		Photo #:	Rearrange goods, equipment and furniture

2.48	Are floor surfaces stable, firm and slip resistant? [302.1]	Yes No		Photo #:	• Change floor surface •
2.49	If there is carpet: Is it no higher than ½ inch? Is it securely attached along the edges? [302.2]	Yes No Measurement: Yes No	%"max ↓	Photo #:	• Replace carpet
Cont 2.50	Is there a clear floor space at least 30 inches wide by at least 48 inches long for a forward or parallel approach? [305.3] Are the operable parts no higher than 48 inches above the floor?* [309.3, 308]	Yes No Measurement: Yes No Measurement:	tems, emergency/alarm boxes, e	Photo #:	*If constructed before 3/15/2012 and a parallel approach is provided, controls can be 54 inches above the floor

2.51	Can the control be operated with one hand and without tight grasping, pinching, or twisting of the wrist? [309.4]	Yes No		Photo #:	• Replace control •
Seati	ng: Assembly Areas – theater	s, auditoriums, s	tadiums, theater style classroom	ıs, etc.	
2.52	Are an adequate number of wheelchair spaces provided? [221.2.1]	Yes No Total #: Wheelchair #:	# of Seats Wheelchair Spaces 4 - 25 1 26 - 50 2 51 - 150 4 151 - 300 5 300+ see 2010 Standards 221.2.1.	Photo #:	Reconfigure to add wheelchair spaces
2.53	Are wheelchair spaces dispersed to allow location choices and viewing angles equivalent to other seating, including specialty seating areas that provide distinct services and amenities? [221.2.3]	Yes No		Photo #:	Reconfigure to disperse wheelchair spaces
2.54	Where people are expected to remain seated, do people in wheelchair spaces have a clear line of sight over and between the heads of others in front of them? [802.2.1.1, 802.1.1.2]	Yes No		Photo #:	Alter for line of sight

2.55	Where people are expected to stand, do people in wheelchair spaces have a clear line of sight over and between the heads of others in front of them? [802.2.2.1, 802.1.2.2]	Yes No		Photo #:	 Alter for line of sight •
2,56	If there is a single wheelchair space, is it at least 36 inches wide? [802.1.2]	Yes No Measurement:	→ 36″min →	Photo #:	• Alter space •
2.57	If there are two adjacent wheelchair spaces, are they each at least 33 inches wide? [802.1.2]	Yes No Measurement:	33"min - 33"	Photo #:	• Alter spaces •
2.58	If the wheelchair space can be entered from the front or rear, is it at least 48 inches deep? [802.1.3]	Yes No Measurement:	48"min	Photo #:	• Alter space •

2.59	If the wheelchair space can only be entered from the side, is it at least 60 inches deep? [802.1.3]	Yes No Measurement:	60"min - 60"	Photo #:	• Alter space •
2.60	Do wheelchair spaces adjoin, but not overlap, accessible routes? [802.1.4]	Yes No	Accessibe Route	Photo #:	• Alter spaces •
2.61	Is there at least one companion seat for each wheelchair space? [221.3]	Yes No		Photo #:	Add companion seats
2.62	Is the companion seat located so the companion is shoulder to-shoulder with the person in a wheelchair? [802.3.1]	Yes No		Photo #:	Alter seating
2.63	Is the companion seat equivalent in size, quality, comfort and amenities to seating in the immediate area? [802.3.2]	Yes No		Photo #:	Add equivalent seating

Seati	ngr-At-dining surfaces (restau	rants, cafeterias,	bars, etc.) and non-employee w	ork surfaces (libraries, confe	rence rooms, etc.)
2.64	Are at least 5%, but no fewer than one, of seating and standing spaces accessible for people who use wheelchairs? [226.1]	Yes No Total #: Wheelchair #:		Photo #:	 Alter to provide accessible spaces •
2.65	Is there a route at least 36 inches wide to accessible seating? [403.5.1]	Yes No Measurement:	36"mln	Photo #:	• Widen route
2.66	At the accessible space(s), is the top of the accessible surface no less than 28 inches and no greater than 34 inches above the floor? [902.3] Note: If for children, the top should be no less than 26 inches and no greater than 30 inches above the floor.	Yes No Measurement:	28"-34"	Photo #:	• Alter surface height
2.67	Is there a clear floor space at least 30 inches wide by at least 48 inches long for a forward approach? [305.3] Does it extend no less than 17 inches and no greater than 25 inches under the surface?	Yes No Measurement: Yes No Measurement:	30"48"		Alter table or work surface Add accessible table or work surface

Institute for Human Centered Design 2014

www.ADAchecklist.org

Priority 2 – Access to Goods & Services

	Is there knee space at least 27 inches high and at least 30 inches wide? [306.2, 306.3] Note: If for children, the knee space may be 24 inches high.	Yes No Measurement:	27"min 30"min 17"- 25"	Photo #:	
Seati	ng: General – reception areas	s, waiting rooms,	etc.		
2.68	Is there at least one space at least 36 inches wide by at least 48 inches long for a person in a wheelchair? [802.1.2, 802.1.3]	Yes No Measurement:	36"x48"		Move furniture and equipment to provide space
V 100 100 100 100 100 100 100 100 100 10				Photo #:	
Benc	nes – In locker rooms, dressin	g rooms, fitting r	ooms This section does not apply to any	other bences.	
2.69	In locker rooms, dressing rooms and fitting rooms, is there at least one room with a bench? [222.1, 803.4]	Yes No		Photo #:	• Add bench •
2.70	Is there a clear floor space at least 30 inches wide by at least 48 inches long at the end of the bench and parallel to the short axis of the bench? Is the bench seat at least 42 inches long and no less than 20 inches and no greater than 24 inches deep?	Yes No Measurement: Yes No Measurement:	48" min 30" min		Move bench Replace bench Affix bench to wall

	Does the bench have back support or is it affixed to a wall? Is the top of the bench seat no less than 17 inches and no greater than 19 inches above the floor? [903]	Yes No Yes No Measurement:	20"- 24" min		
			17"- 19"	Photo #:	
Checl	«Out Aisles – supermarkets, l	arge retail stores	, etc.		
2.71	Is the aisle at least 36 inches wide? [904.3.1]	Yes No Measurement:	36"min	Photo #:	• Widen aisle •
2.72	Is the counter surface of at least one aisle no higher than 38 inches above the floor? [904.3.2]	Yes No	38"max	Photo #:	• Lower counter • .

2.73	Is the top of the counter edge protection no higher than 2 inches above the counter surface? [904.3.2]	Yes No	² 2"max	Photo #:	• Lower edge protection •
2.74	If there is a check writing surface, is the top no less than 28 inches and no greater than 34 inches above the floor? [904.3.3]	Yes No Measurement:	28"-34"	Photo #:	Alter check writing surface
2.75	If there is more than one check- out aisle is there a sign with the International Symbol of Accessibility at the accessible aisle? [216.11]	Yes No	Q.	Photo #:	• Add sign •
Sales	& Service Counters – banks, s	tores, dry cleane	ers, auto repair shops, fitness club	os, etc.	
2.76	Is there a portion of at least one of each type of counter that is: No higher than 36 inches above the floor?	Yes No Measurement:	36"min 36"max	35 30.5	Lower section of counter Lengthen section of counter
	At least 36 inches long? [904.4.1]	Yes No Measurement:	30 IIIdX	Photo #:	

2.77	Does the accessible portion of the counter extend the same depth as the counter top? [904.4]	Yes No Measurement:		Photo #:	• Alter accessible portion •
2.78	Is there a clear floor space at least 30 inches wide by at least 48 inches long for a forward or parallel approach? [904.4]	Yes No Parallel Measurement: Forward Measurement:	30"min Or Or 48"min 48"min	Photo #:	• Reconfigure to provide a parallel or forward approach
2.79	For a parallel approach, is the clear floor space positioned with the 48 inches adjacent to the accessible length of counter? [904.4.1]	Yes No Measurement:	48"min	Photo #:	If a parallel approach is not possible, a forward approach is required

2.80	For a forward approach: Do no less than 17 and no greater than 25 inches of the clear floor space extend under the accessible length of the counter? [306.2.2, 306.2.3] Is there at least 27 inches clearance from the floor to the bottom of the counter? [306.3.1]	Yes No Measurement: Yes No Measurement:	17-25" 48"min	Photo#:	Reconfigure to provide knee clearance
2.81	Does at least one of each type of self-service shelf or dispensing device for tableware, dishware, condiments, food and beverages have a forward or parallel approach? [904.5.1]	alad bars, eat-in Yes No Forward Parallel	fast food establishments, etc. Or		 Reconfigure to provide approach •

				Photo#:	
2.82	If there is an unobstructed parallel approach, is the shelf or dispensing device no higher than 48 inches above the floor? [308.3.1]	Yes No Measurement:	48" max	Photo #:	Lower shelf and/or dispensing device
2.83	If there is a shallow obstruction no deeper than 10 inches with a parallel approach, is the shelf or dispensing device no higher than 48 inches above the floor? [308.3.1]	Yes No Measurement:	10° max	Photo#:	Lower shelf and/or dispensing device
2.84	If there is an obstruction no less than 10 inches and no greater than 24 inches deep with a parallel approach, is the shelf or dispensing device no higher than 46 inches above the floor? [308.3.2]	Yes No Measurement:	46° max	Photo #:	Lower shelf and/or dispensing device


2.85	If there is an unobstructed forward approach, is the shelf or dispensing device no higher than 48 inches above the floor? [308.2.1]	Yes No	48"max	Photo #:	Lower shelf and/or dispensing device
2.86	If there is an obstruction no deeper than 20 inches with a forward approach: Does clear floor space extend under the obstruction that is at least the same depth as the obstruction? Is the shelf or dispensing device no higher than 48 inches above the floor? [904.5.1]	Yes No Measurement: Yes No Measurement:	20"max 20"mln	Photo #:	Reconfigure to provide knee space Lower shelf and/or dispensing device
2.87	If the obstruction is no less than 20 inches and no greater than 25 inches deep with a forward approach: Does clear floor space extend under the obstruction that is at least the same depth as the obstruction? Is the shelf or dispensing device no higher than 44 inches above the floor? [904.5.1]	Yes No Measurement: Yes No Measurement:	20"-25" 44" max	Photo #:	Reconfigure to provide knee space Lower shelf and/or dispensing device

2.88	If there is a tray slide, is the top no less than 28 inches and no greater than 34 inches above the floor? [904.5.2]	Yes No	28"-34"	Photo#:	• Reconfigure •
			/		•
		Yes No		·	•
		,			•
p				Photo #:	
		Yes No			
					•
				·	•
		<u></u>		Photo #:	
		Yes No			•
			·	•	
					•
				Photo #:	
		Yes No			•
					9
					•
 -				Photo #:	
		Yes No		,	•
					٥
				Photo #:	

The ADA Checklist for Existing Facilities

Priority 3 - Toilet Rooms

Based on the 2010 ADA Standards for Accessible Design

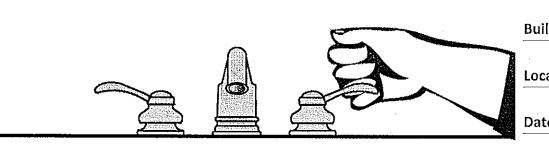

Project

Building

Location

Date

Surveyors

Contact Information

When toilet rooms are open to the public they should be accessible to people with disabilities.



Institute for Human Centered Design www.HumanCenteredDesign.org 2014



ADA National Network Questions on the ADA 800-949-4232 voice/tty www.ADAchecklist.org

This checklist was produced by the New England ADA Center, a project of the Institute for Human Centered Design and a member of the ADA National Network. This checklist was developed under a grant from the Department of Education, NIDRR grant number H133A060092-09A. However the contents do not necessarily represent the policy of the Department of Education, and you should not assume endorsement by the Federal Government.

Questions or comments on the checklist contact the New England ADA Center at 617-695-0085 voice/tty or ADAinfo@NewEnglandADA.org

For the full set of checklists, including the checklists for recreation facilities visit www.ADAchecklist.org.

Pric	ority 3 – Toilet Rooms			Comments	Possible Solutions
3.1	If toilet rooms are available to the public, is at least one toilet room accessible? (Either one for each sex, or one unisex.) Note: If toilet rooms are chiefly for children, e.g., in elementary schools and day care centers, use the children's specifications in Toilets - 604.1, 604.8, 604.9,	Yes No			 Reconfigure toilet rooms Combine toilet rooms to create one unisex accessible toilet room
	609.4 and Lavatories and Sinks – 606.2.			Photo #:	
3.2	Are there signs at inaccessible toilet rooms that give directions to accessible toilet rooms? [See 2010 ADA Standards for Accessible Design 216.8]	Yes No		Photo #:	• Install signs •
3.3	If not all toilet rooms are accessible, is there a sign at the accessible toilet room with the international Symbol of Accessibility? [216.8]	Yes No	G	Photo #:	• Install sign •
Acce:	sible Route	\			
3.4	Is there an accessible route to the accessible toilet room? [206.2.4]	Yes No			• Alter route •
	-			Photo #:	

Signs.	at Tollet Rooms				7000 - 70
3.5	Do text characters contrast with their backgrounds? [703.5]	Yes No			Install tactile signRelocate sign
	Are text characters raised? [703.2]	Yes No			
	Is there Braille? [703.3]	Yes No	MEN	·	
	Is the sign mounted: On the wall on the latch side of the door? [703.4.2]	Yes No	nowled ::.		
	Note: Signs are permitted on the push side of doors with closers and without hold-open devices.	,			
P	With clear floor space beyond the arc of the door swing between the closed position and 45-degree open position, at least 18 x 18 inches centered on the tactile characters? * [703.4.2]	Yes No	centered on tactile characters min		*If constructed before 3/15/2012 and a person may approach within 3 inches of the sign without encountering protruding objects or standing within the door swing, relocation
	So the baseline of the lowest character is at least 48 inches above the floor and the baseline of the highest character is no more than 60	Yes No	60 max 48 min		*If constructed before 3/15/2012 and mounted no higher than 60 inches to the centerline of the sign, relocation is not

Institute for Human Centered Design 2014 www.ADAchecklist.org

Priority 3 – Toilet Rooms

	inches above the floor? * [703.4.1]				required
	Note: If the sign is at double doors with one active leaf, the sign should be on the inactive leaf; if both leaves are active, the sign should be on the wall to the right of the right leaf.	5 ger ou	reroll (Photo #:	
Entra	nce	Affect on the second second			
3.6	Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [404.2.3]	Yes No Measurement:	32"min — 90°		Install offset hinges Alter the doorway
				Photo #:	
3.7	If there is a front approach to the pull side of the door is there at least 18 inches of maneuvering clearance beyond the latch side plus 60 inches clear depth?	Yes No Measurement:	18"min\		Remove obstructions Reconfigure walls Add automatic door opener
	Note: See 2010 Standards 404.2.4 for maneuvering clearance requirements on the push side of the door and side approaches to the pull side of the door	2710	60" mln		
	On both sides of the door, is the floor surface of the	Yes No			
Institu 2014	te for Human Centered Design	V /	www.ADAchecklist.org		Priority 3 – Toilet Rooms Page 5

	maneuvering clearance level (no steeper than 1:48)? [404.2.4]	Measurement:			
				Photo #:	
3.8	If the threshold is vertical is it no more than ¼ inch high? Or	Yes No Measurement:			• Remove or replace threshold
	No more than ½ inch high with the top ½ inch beveled no ysteeper than 1:2, if the	Yes No Measurement:	1/4*(nex++:		
	threshold was installed on or after the 1991 ADA Standards went into effect (1/26/93)? Or				
	No more than ¾ inch high with the top ¼ inch beveled no steeper than 1:2, if the threshold was installed before	Yes No Measurement:	1/2*məx+		
	the 1991 ADA Standards went into effect (1/26/93)? [404.2.5, 303.2]				
	Note: The first ¼ inch of the ½ or ¾ inch threshold may be vertical; the rest must be beveled.	The second secon		·	
	percied.		3/4"max[Photo #:	

3.9	Is the door equipped with hardware that is operable with one hand and does not require tight grasping, pinching or twisting of the wrist? Door handle?	Yes No			Replace inaccessible knob with lever, loop or push hardware Add automatic door opener
	Lock (if provided)? [404.2.7]			Photo #:	
3.10	Are the operable parts of the door hardware mounted no less than 34 inches and no greater than 48 inches above the floor? [404.2.7]	Yes No Measurement:	34"-48"	Photo #:	Change hardware height
3.11	Can the door be opened easily (5 pounds maximum force)? [404.2.9] Note: You can use a pressure gauge or fish scale to measure force. If you do not have one you will need to judge whether the door is easy to open.	Yes No Measurement:	5 lbf	Photo #:	Adjust or replace closers Install lighter doors Install power-assisted or automatic door openers
			765	6165 or	V .

					=
3.12	If the door has a closer, does it take at least 5 seconds to close from an open position of 90 degrees to a position of 12 degrees from the latch? [404.2.8.1]	Yes No	30° 12°	Photo #:	• Adjust closer
3.13	If there are two doors in a series, e.g. vestibule, is the distance between the doors at least 48 inches plus the width of the doors when swinging into the space? [404.2.6]	Yes No Measurement:	or 48"min or 48"min	Photo #:	Remove inner door Change door swing
-		<u> </u>		<u> </u>	<u> </u>

3.14	If there is a privacy wall and the door swings out, is there at least 24 inches of maneuvering clearance beyond the door latch side and 42 inches to the privacy wall? [404.2.4]	Yes No Measurement:	24"min 48"min privacy wall	Phone C 501	Reconfigure space
3.15	If there is a privacy wall and the door swings in, is there at least 24 inches of maneuvering clearance beyond the door latch side and at least 48 inches to the privacy wall if there is no door closer or at least 54 inches if there is a door closer? [404.2.4]	Yes No Measurement:	48 min 48 min privacy wall	men tomms Photo #:	• Reconfigure space •
In the	e Tollet Room	_/			
3.16	Is there a clear path to at least one of each type of fixture, e.g. lavatory, hand dryer, etc., that is at least 36 inches wide? [403.5.1]	Yes No Measurement:	36"min		Remove obstructions
				Photo #:	
3.17	Is there clear floor space available for a person in a wheelchair to turn around, i.e. a circle at least 60 inches in diameter or a T-shaped space within a 60-inch square? [603.2.1]	Yes No Measurement:	36" \(\begin{array}{ccccc} \begin{array}{cccccccccccccccccccccccccccccccccccc	Mens the Start	 Move or remove partitions, fixtures or objects such as trash cans •

3.18	In a single user toilet room if the door swings in and over a clear floor space at an accessible fixture, is there a clear floor space at least 30 x 48 inches beyond the swing of the door? [603.2.3 Exception 2]	Yes No Measurement:		Photo #:	 Reverse door swing Alter toilet room
3.19	If the mirror is over a lavatory or countertop, is the bottom edge of the reflecting surface no higher than 40 inches above the floor? Or If the mirror is not over the lavatory or countertop, is the bottom edge of the reflecting surface no higher than 35 inches above the floor?* [603.3]	Yes No Measurement: Yes No Measurement:	HOM nen Julian Julia	Photo #:	* If installed before 3/15/2012 and the bottom edge of the reflecting surface is no higher than 40 inches above the floor, lowering the mirror to 35 inches is not required • Lower the mirror • Add another mirror
3.20	If there is a coat hook, is it no less than 15 inches and no greater than 48 inches above the floor?* [603.4]	Yes No	15"min	Photo #:	Adjust hook Replace with or provide additional accessible hook If installed before 3/15/2010 and the clear floor space allows a parallel approach, the coat hook may be 54 inches above the floor.

Lava	Lavatories The 2010 Standards refer to sinks in tollet rooms as lavatories,						
3.21	Does at least one lavatory have a clear floor space for a forward approach at least 30 inches wide and 48 inches long? [606.2]	Yes No	48"min ————————————————————————————————————	Photo #:	Alter lavatory Replace lavatory		
3.22	Do no less than 17 inches and no greater than 25 inches of the clear floor space extend under the lavatory so that a person using a wheelchair can get close enough to reach the faucet? [306.2]	Yes No	mens 18 women	Photo #:	Alter lavatory Replace lavatory		
3.23	Is the front of the lavatory or counter surface, whichever is higher, no more than 34 inches above the floor? [606.3]	Yes No	wang	33~ n5 3 3 Photo#:	Alter lavatory Replace lavatory		
3.24	Is there at least 27 inches clearance from the floor to the bottom of the lavatory that extends at least 8 inches under the lavatory for knee clearance? [306.3.3]	Yes No	Main 27"min woman	30 30 Photo#:	Alter lavatory Replace lavatory		

3.25	Is there toe clearance at least 9 inches high? [306.3.3] Note: Space extending greater than 6 inches beyond the available toe clearance at 9 inches above the floor is not considered toe clearance.	Yes No	9"" A-6"+ mln" max 48"	Photo #:	Alter lavatory Replace lavatory
3.26	Are pipes below the lavatory insulated or otherwise configured to protect against contact? [606.5]	Yes No		Photo#:	 Install insulation Install cover panel •
3.27	Can the faucet be operated without tight grasping, pinching, or twisting of the wrist? Is the force required to activate the faucet no greater than 5 pounds? [606.4]	Yes No		Photo #:	Adjust faucet Replace faucet

Soap	Dispensers and Hand Dryers	2010 Standards – 60.	3)		
3.28	Are the operable parts of the soap dispenser within one of the following reach ranges: Above lavatories or counters no less than 20 inches and no greater than 25 inches deep: no higher than 44 inches above the floor? [308.2.2] Above lavatories less than 20 inches deep: no higher than 48 inches above the floor?	Yes No Measurement:	48"max	mens, 49 ab hand dryen	
	Not over an obstruction: no higher than 48 inches above the floor? [308.2]	Yes No Measurement:	48"max	Photo #:	39 3 8°0
3.29	Are the operable parts of the hand dryer or towel dispenser within one of the following reach ranges: Above lavatories or counters no less than 20 inches and no greater than 25 inches deep: no higher than 44 inches above the	Yes No Measurement:	-20-25"-> 44"max	womens pager	Adjust dispensers Replace with or provide additional accessible dispensers

			122	
Above lavatories less than 20 inches deep: no higher than 48 inches above the floor? Not over an obstruction: no higher than 48 inches above the floor? [308.2] Can the operable parts of the hand dryer or towel dispenser be operated without tight grasping, pinching or twisting of the wrist? Is the force required to activate the hand dryer or towel dispenser no greater than 5	X Line	48"max 48"max	Sink could Sink shuck	000000 940
pounds?	Measurement:			
[309.4]		•	Photo #:	
Water Closets in Single-User Toilet	Rooms and Com	partments (Stalls) The 2010 Standar	ds refer to toilets as watercosets.	
3.30 Is the centerline of the water closet no less than 16 inches and no greater than 18 inches from the side wall or partition? [604.2]	Yes No Measurement:	16"-18"	ds:refer to tollets as water/closets.	Move toilet Replace toilet Move partition

3.31	Is clearance provided around the water closet measuring at least 60 inches from the side wall and at least 56 inches from the rear wall?* [604.3.1]	Yes No Measurement:		Photo #:	* If constructed before 3/15/12, clearances around water closets in single user toilet rooms can be 48 inches wide by 66 inches long or 48 inches wide by 56 inches long (depending on the approach to the water closet, see 1991 Standards Figure 28) and the lavatory may overlap that clearance if the door to the room does not swing into the required clearances at fixtures (such as lavatories, water closet and urinals) and the edge of the lavatory is at least 18 inches from the centerline of the water closet • Alter room/compartment for clearance
3.32	Is the height of the water closet no less than 17 inches and no greater than 19 inches above the floor measured to the top of the seat? [604.4]	Yes No Measurement:	17"-19"	Photo#:	• Adjust toilet height Replace toilet

3.33	Is there a grab bar at least 42 inches long on the side wall?	Yes No	• Install grab bar • Relocate grab bar	
	/	Measurement:	Nomens 431 Relocate objects	
٠	Is it located no more than 12 inches from the rear wall?	Yes No	12" 54"min max 54"min mon 5 yeo / Inches	
	/	wedsarement.	word yo lin	
	Does it extend at least 54 inches from the rear wall? [604.5.1]	Yes No Measurement:	mens yes	
	[55]	ار ا		
	menes above the floor to file .	Yes No Measurement:	mons yes 33/2, 33"-36" womens 33	
	top of the gripping surface? [609.4]		* If constructed before	
	Is there at least 12 inches	Yes No	3/15/2012 grab bars do not need to be relocated	
	clearance between the grab bar and protruding objects above?*	Measurement: , .	There are no space requirements above and below grab bars in the	d
	Is there at least 1½ inches clearance between the grab bar	Yes QNo	below grab bars in the 1991 Standards	
	and projecting objects below?*	Meağurement:	172 (101)	
	Is the space between the wall and the grab bar 1 ½ inches?	Yes No Measurement:	Womens = Whon	
	[609.3]	,	Photo #:	

3.34	Is there a grab bar at least 36 inches long on the rear wall?	Yes No Measurement:	wmus = 36 cm	 Install grab bar Relocate grab bar Relocate objects.
	Does it extend at least 12 inches from the centerline of the water closet on one side (side wall)?	Yes No Measurement:	36"min 12" + min 5 (2 5
	Does it extend at least 24 inches on the other (open) side?	Yes No Measurement:	_ pernen	5=25 5
	Is it mounted no less than 33 inches and no greater than 36 inches above the floor to the top of the gripping surface? [609.4]	Yes No Measurement:	34," Wa	mon S
	Are there at least 12 inches clearance between the grab bar and protruding objects above?*	Yes No Measurement:		
	Are there at least 1½ inches clearance between the grab bar and projecting objects below?*	Yes No Measurement:	12"min 1/2"min	* If constructed before 3/15/2012 grab bars do not need to be relocated;
	Is the space between the wall and the grab bar 1½ inches? [609.3]	Yes No Measurement:	Photo #:	there are no space requirements above and below grab bars in the 1991 Standards

3.35	If the flush control is hand operated, is the operable part located no higher than 48 inches above the floor? [604.6]	Yes No Measurement:	48"max	Photo #:	 Move control Install sensor with override button no higher than 48 inches
3.36	If the flush control is hand operated, can it be operated with one hand and without tight grasping, pinching, or twisting of the wrist? Is the force required to activate the flush control no greater than 5 pounds? [605.4]	Yes No Yes No Measurement:			Change control Adjust control
3.37	Is the flush control on the open side of the water closet? [604.6]	Yes	+ open side +	Photo #:	• Move control •
3.38	Is the toilet paper dispenser located no less than 7 inches and no greater than 9 inches from the front of the water closet to the centerline of the dispenser?* [604.7]	Yes No Measurement:	7.9"		* If constructed before 3/15/2012 dispenser does not need to be relocated if it is within reach from the water closet seat; the 1991 Standards do not specify distance from the front of the water closet

Institute for Human Centered Design 2014

www.ADAchecklist.org

Priority 3 – Toilet Rooms

					Relocate dispenser
				Photo #:	•
3.39	Is the outlet of the dispenser: Located no less than 15 inches and no greater than 48 inches above the floor? Not located behind grab bars? [604.7]	Yes No Measurement:	day and a second a	men 8 44 Women 5 491/2 Photo #:	• Relocate dispenser •
3.40	Does the dispenser allow continuous paper flow? [604.7]	Yes No		Photo #:	 Adjust dispenser Replace dispenser
Toile	t Compartments (Stalls)			o frances of the property of the second of t	
3.41	Is the door opening width at least 32 inches clear, between the face of the door and the stop, when the door is open 90 degrees? [604.8.1.2]	Yes No Measurement:	32"min →	Photo #:	• Widen door width

3.42	If there is a front approach to the pull side of the door, is there at least 18 inches of maneuvering clearance beyond the latch side plus 60 inches clear depth? [604.8.1.2] Note: See 2010 Standards 604.8.1.2 Doors for maneuvering clearance requirements on the push side of the door and side approaches to the pull side of	Yes No	18"min 60"min	wens 60	Remove obstructions
	the door			Photo #:	
3.43	Is the door self-closing? [604.8.1.2]	Yes No		Self Close Not late	Add closer Replace door
3.44	Are there door pulls on both sides of the door that are operable with one hand and do not require tight grasping pinching or twisting of the wrist?* [604.8.1.2]	Yes No		Photo#: Only on 1 Side	* If constructed before 3/15/2012 door pulls do not need to be added; door pulls are not required in the 1991 Standards • Replace hardware
				Photo #:	8


3.45	Is the lock operable with one hand and without tight grasping, pinching or twisting of the wrist? [309.4]	Yes No		Photo #:	Replace lock
3.46	Are the operable parts of the door hardware mounted no less than 34 inches and no greater than 48 inches above the floor? [404.2.7]	Yes No Measurement:	34" 48"	men 5 80, men 5 37! Photo #:	• Relocate hardware •
3.47	Is the compartment at least 60 inches wide? [604.8.1.1]	Yes No	60"min	Photo #:	• Widen compartment • •
3.48	If the water closet is wall hung, is the compartment at least 56 inches deep? [604.8.1.1]	Yes No Measurement:	56"min —>	Photo #:	Widen compartment

Alter compartment at least 59 inches deep? Fibus Fibus			1\ 1			
3.50 If the door swings in, is the minimum required compartment area provided beyond the swing of the door (60 inches x 56 inches if water closet is wall hung or 59 inches if water closet is floor mounted)? [604.8.1.1] Yes	3,49	at least 59 inches deep?		59"min	Photo #:	Alter compartment
Photo #: Photo #: Yes No Photo #:	3,50	minimum required compartment area provided beyond the swing of the door (60 inches x 56 inches if water closet is wall hung or 59 inches if water closet is floor mounted)?		60"mln		
Photo #: Photo #: Yes No Photo #:			Ves No			
Yes No Photo #: Yes No •••••••••••••••••••••••••••••••••••				•		
Yes No Photo #: Yes No •••••••••••••••••••••••••••••••••••			•			•
Yes No Photo #: Yes No •••••••••••••••••••••••••••••••••••					Photo #	
Photo #: Yes No • • • • • • • • • • • • • • • • • •					THOLOW.	
Photo #: Yes No • • •			LIYes INo		·	•
Yes No •						0
Yes No •						
	· - · · · · · · · · · · · · · · · · · ·				Photo #:	
			Yes No			•
						•
Photo #:						ė.
					Photo #:	

ADA Checklist for Existing Facilities

Priority 4 – Additional Access

Based on the 2010 ADA Standards for Accessible Design

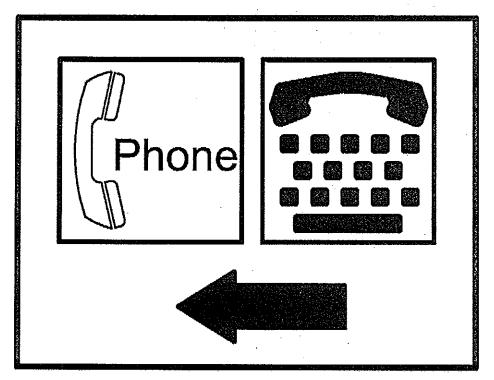

Project	•	-		
Building			 	
Location				
Date				
Surveyors			 	
Contact Information				

Amenities such as drinking fountains and public telephones should be accessible to people with disabilities.



Institute for Human Centered Design www.HumanCenteredDesign.org 2014



ADA National Network
Questions on the ADA 800-949-4232 voice/tty
www.ADAchecklist.org

This checklist was produced by the New England ADA Center, a project of the Institute for Human Centered Design and a member of the ADA National Network. This checklist was developed under a grant from the Department of Education, NIDRR grant number H133A060092-09A. However the contents do not necessarily represent the policy of the Department of Education, and you should not assume endorsement by the Federal Government.

Questions or comments on the checklist contact the New England ADA Center at 617-695-0085 voice/tty or ADAinfo@NewEnglandADA.org

For the full set of checklists, including the checklists for recreation facilities visit www.ADAchecklist.org.

Pric	ority 4 – Additional Acces			Comments	Possible Solutions
Drin	king Fountains				
4.1	Does at least one drinking fountain have a clear floor space at least 30 inches wide x at least 48 inches long centered in front of it for a forward approach?* [See 2010 ADA Standards for Accessible Design – 602.2]	Yes No	48"min 30"min	Photo #:	*If installed before 3/15/2012, a parallel approach is permitted and the clear floor space is not required to be centered • Alter space • Relocate drinking fountain • Install a drinking fountain in another location
4.2	If there is a forward approach, do no less than 17 inches and no greater than 25 inches of the clear floor space extend under the drinking fountain? [306.2.2, 306.2.3] Note: If the drinking fountain is primarily for children's use and the spout is no more than 30 inches above the floor and no more than 3 ½ inches from the edge of the unit, a parallel approach is permitted.	Yes No Measurement:	17".25"	Photo #:	Alter space Replace drinking fountain

ADA (Checklist for Existing Facilities		703	Priority 4	- Additional Access
4.3	If the drinking fountain is no deeper than 20 inches, are the operable parts no higher than 48 inches above the floor? [308.2.2]	Yes No Measurement:	20" max	··. Photo #:	 Adjust drinking fountain Replace drinking fountain
4.4	If the drinking fountain is no less than 20 inches and no greater than 25 inches deep, are the operable parts no higher than 44 inches above the floor? [308.2.2]	Yes No	20"min to 25"max	Photo#:	 Adjust drinking fountain Replace drinking fountain
4.5	Can the control be operated with one hand and without tight grasping, pinching or twisting of the wrist? Is the force required to activate the control no more than 5 pounds? [309.4]	Yes No Yes No Measurement;		Photo #:	Change control Adjust control
4.6	Is the spout outlet no higher than 36 inches above the floor? [602.4]	Yes No Measurement:	36" max		Adjust drinking fountain Replace drinking fountain
] ,		Photo #:	

4.7	Is the spout: At least 15 inches from the rear of the drinking fountain? No more than 5 inches from the front of the drinking fountain? [602.5]	Yes No Measurement: Yes No Measurement:	-5 ² - 15" - min		Adjust spout Replace drinking fountain
4.8	If there is more than one drinking fountain, is there at least one for standing persons? [211.2] Is the spout outlet no lower than 38 inches and no higher than 43 inches above the floor? [602.7]	Yes No Yes No Measurement:	38" to 43"	Photo #: Photo #:	Adjust drinking fountain Install new drinking fountain for standing height
4.9	If the leading (bottom) edge of the fountain is higher than 27 inches above the floor, does the front of the fountain protrude no more than 4 inches into the circulation path? [307.2]	Yes No	27"	Photo#:	 Adjust drinking fountain Replace drinking fountain Add tactile warning such as permanent planter or partial walls

Public	: Telephones				
4.10	Does at least one telephone have a clear floor space at least 30 inches wide x at least 48 inches long for a parallel or forward approach? [704.2.1]	Yes No	48"min 30"min 48"min 30"min 48"min	Photo #:	Move telephone Install new telephone for clear floor space
4.11	Is the highest operable part of the telephone no higher than 48 inches above the floor? [704.2.2]	Yes Nó Measurement:	48" max	Photo #:	• Adjust telephone •
4.12	If the leading (bottom) edge of the telephone is higher than 27 inches above the floor, does the front of the telephone protrude no more than 4 inches into the circulation path? [307.2]	Yes No	> 27"	Photo #:	• Adjust telephone •

4.13	Does at least one telephone have a volume control? [704.3]	Yes No	C PRESS TO CHANGE VOLUME 4 LEVELS	Photo #:	 Install volume control Replace telephone with one that has volume control
4.14	Is the volume control identified by a pictogram of a telephone handset with radiating sound waves? [703.7.2.3]	Yes No		Photo #:	• Add pictogram •
4.15	Does at least one telephone have a TTY? [217.4.1] Note: TTY's are devices that employ interactive text-based communication through the transmission of coded signals across the telephone network. They are mainly used by people who are deaf and/or cannot speak.	Yes No		Photo #:	• Install TTY •

4.16	is the touch surface of the TTY keypad at least 34 inches above the floor? [704.4.1] Note: If a seat is provided, the TTY is not required to be 34 inches minimum above the floor.	Yes No	34"mln	Photo #:	• Adjust height of TTY •
4.17	Is the TTY identified by the International Symbol of TTY? [703.7.2.2]	Yes No		Photo #:	• Add symbol •
4.18	Do signs that provide direction to public telephones also provide direction to the TTY? [216.9.2]	Yes No	Phone name name name name name name name na	Photo #:	• Add signs •
4.19	Do telephones that do not have a TTY provide direction to the TTY? [216.9.2]	Yes No		Photo #:	• Add signs

Fire A	Marm Systems				
4.20	If there are fire alarm systems, do they have both flashing lights and audible signals? [702.1]	Yes No	F I I I I I I I I I I I I I I I I I I I	Photo #:	Install audible and visual alarms .
		Yes No			•
				Photo #:	
		Yes No			•
		Table 1998		Photo #:	
		Yes No		7	•
				Photo #:	
		Yes No			•
					•
				Photo #:	